


HIT-FHD6516(PC) Touch

Technical Specifications

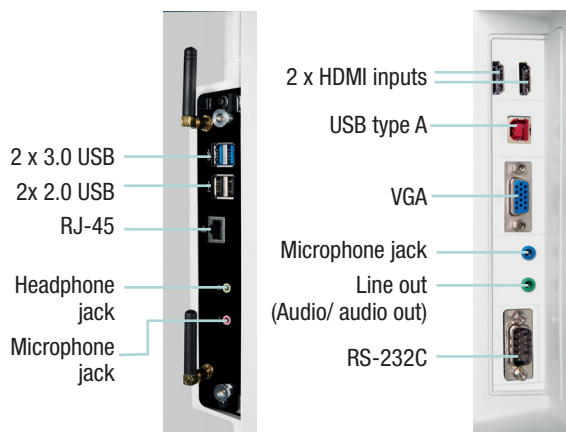

LCD Component	65" TFT LCD [64.5 inches (163.8 cm) diagonal]
Backlight	Edge LED Backlight
Max. Resolution	1920 x 1080
Max. Colours	1.07 billion colours
Brightness	360 cd/m2
Contrast Ratio	4000:1
Viewing Angle (H/V)	178° /178°
Video Colour System	480i, 480P, 576P, 720P, 1080i/30, 1080i/50, 1080P/24,
Signal (Analog)	VGA, SVGA, XGA, WXGA, FULL-HD
Panel Life Time	30000 hours
Frequency	60Hz
Touch Screen	Infrared Touch Screen 6 points support
Glass	Anti Glare
Input Terminals	<ul style="list-style-type: none"> Digital HDMI x 2 supporting HDCP decoding. Analog VGA x 1 D-Sub 15 pin. PLUG & PLAY DDC2B (VESA) for Computer HDMI-1, VGA Audio Microphone mini 3.5mm jack x 1, Line out 3.5mm x 1 Control (RS-232C) D-Sub 9pin x1 for device control USB Type A USB x 1 (for external usage of Touch screen)
Output Terminals	<ul style="list-style-type: none"> Audio Line out (3.5mm mini jack) x 1 Control (RS-232C) D-sub 9 pin x 1 For External Speaker Total 20W speaker support
OSD	Independent from languages, the OSD is iconic
Screen Freeze	Screen Freeze Capability
Speaker	15W + 15W
TouchPanel	<ul style="list-style-type: none"> Detection Method Infrared blocking detection method, 6514 – 4 touch, 6516 – 6 touch Detection Area 1428.48mm (H) x 803.52mm (V) Touch Accuracy ±2mm(over 90% Area) PC Connector USB 2.0 Driver Win7/8 32/64bits OS inbox driver and driver for touch screen calibration Touch Pen Passive stylus, finger or any IR opaque object.
Power Requirement	220V ~50Hz 1.2 A
Operating/Storage Temperature	Operating temperature: 0 - 50 degrees Celcius Storage temperature: -15 to 50 degrees Celcius
Operating/Storage Humidity	Operating Humidity: 90% relative humidity non-condensing
Power Consumption Operating/Standby	270W / 1W
Dimensions (mm)	1,562 x 93 x 960
Weight	57kg, 125.6lbs
Colour	White Bezel
Main Accessories	Power Cable (1450mm), IB, Remote Controller and Battery (CR2025 3V), HDMI Cable (1500mm), Dipole Wi-Fi antenna, Stylus Pen, Driver DVD
Remote Control	Protocol: NEC6122 Carrier Frequency: 37.92KHz
Certification	RoHs, CB, S-Mark
OPS PC Specification	
Processor	Intel I3 2.10GHz
Operating System	Windows 8.1 Pro 64-bit
Chipset	Sandy Bridge Mobile CPU
System Memory	4GB RAM, 500GB HDD
Network	<ul style="list-style-type: none"> WLAN 802.11 a/b/g/n Dual Band 2.4GHz-5GHz with MIMO support. Bluetooth 4.0 LAN: 10/100/1000 Mbps LAN support
USB	3.0 USB x2, 2.0 USB x2