


# HIT-FHD6516(PC) Touch

**HITACHI**  
Inspire the Next

## Technical Specifications

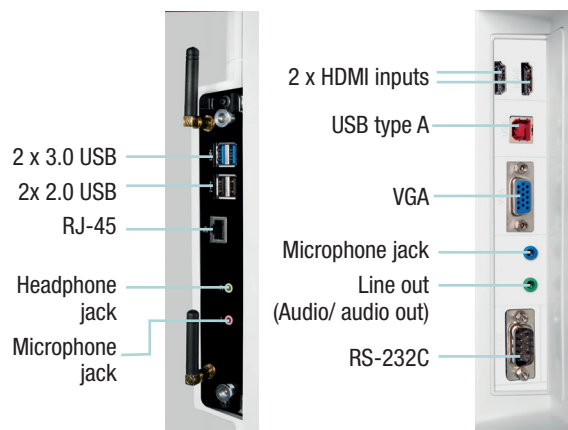

LCD Component	65" TFT LCD [64.5 inches (163.8 cm) diagonal]
Backlight	Edge LED Backlight
Max. Resolution	1920 x 1080
Max. Colours	1.07 billion colours
Brightness	360 cd/m2
Contrast Ratio	4000:1
Viewing Angle (H/V)	178° /178°
Video Colour System	480i, 480P, 576P, 720P, 1080i/30, 1080i/50, 1080P/24,
Signal (Analog)	VGA, SVGA, XGA, WXGA, FULL-HD
Panel Life Time	30000 hours
Frequency	60Hz
Touch Screen	Infrared Touch Screen 6 points support
Glass	Anti Glare
Input Terminals	<div> <div>Digital</div> <div>Analog</div> <div>PLUG &amp; PLAY</div> <div>Audio</div> <div>Control (RS-232C)</div> <div>USB Type A</div> </div> <div> <div>HDMI x 2 supporting HDCP decoding.</div> <div>VGA x 1 D-Sub 15 pin.</div> <div>DDC2B (VESA) for Computer HDMI-1, VGA</div> <div>Microphone mini 3.5mm jack x 1, Line out 3.5mm x 1</div> <div>D-Sub 9pin x1 for device control</div> <div>USB x 1 (for external usage of Touch screen)</div> </div>
Output Terminals	<div> <div>Audio</div> <div>Control (RS-232C)</div> <div>For External Speaker</div> </div> <div> <div>Line out (3.5mm mini jack) x 1</div> <div>D-sub 9 pin x 1</div> <div>Total 20W speaker support</div> </div>
OSD	Independent from languages, the OSD is iconic
Screen Freeze	Screen Freeze Capability
Speaker	15W + 15W
TouchPanel	<div> <div>Detection Method</div> <div>Detection Area</div> <div>Touch Accuracy</div> <div>PC Connector</div> <div>Driver</div> <div>Touch Pen</div> </div> <div> <div>Infrared blocking detection method, 6514 – 4 touch, 6516 – 6 touch</div> <div>1428.48mm (H) x 803.52mm (V)</div> <div>±2mm(over 90% Area)</div> <div>USB 2.0</div> <div>Win7/8 32/64bits OS inbox driver and driver for touch screen calibration</div> <div>Passive stylus, finger or any IR opaque object.</div> </div>
Power Requirement	220V ~50Hz 1.2 A
Operating/Storage Temperature	Operating temperature: 0 - 50 degrees Celcius Storage temperature: -15 to 50 degrees Celcius
Operating/Storage Humidity	Operating Humidity: 90% relative humidity non-condensing
Power Consumption Operating/Standby	270W / 1W
Dimensions (mm)	1,562 x 93 x 960
Weight	57kg, 125.6lbs
Colour	White Bezel
Main Accessories	Power Cable (1450mm), IB, Remote Controller and Battery (CR2025 3V), HDMI Cable (1500mm), Dipole Wi-Fi antenna, Stylus Pen, Driver DVD
Remote Control	Protocol: NEC6122 Carrier Frequency: 37.92KHz
Certification	RoHs, CB, S-Mark
PC Specification	
Processor	Intel I3 2.10GHz
Operating System	Windows 8.1 Pro 64-bit
Chipset	Sandy Bridge Mobile CPU
System Memory	4GB RAM, 500GB HDD
Network	<div> <div>WLAN</div> <div>Bluetooth</div> <div>LAN:</div> </div> <div> <div>802.11 a/b/g/n Dual Band 2.4GHz-5GHz with MIMO support.</div> <div>Bluetooth 4.0</div> <div>10/100/1000 Mbps LAN support</div> </div>
USB	3.0 USB x2, 2.0 USB x2